
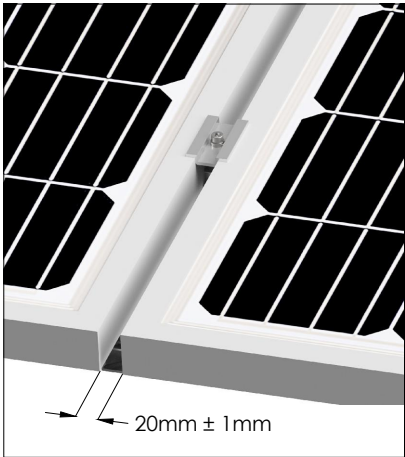
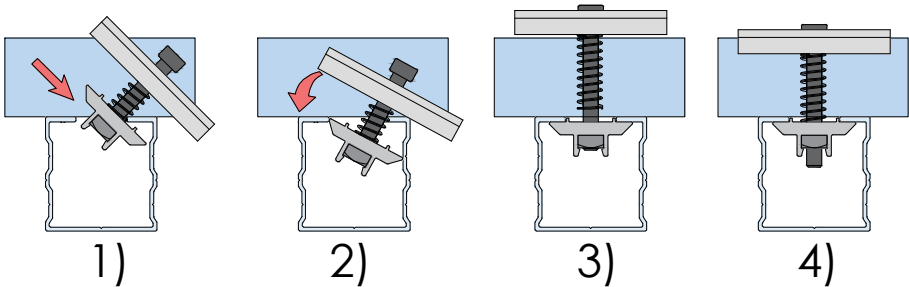


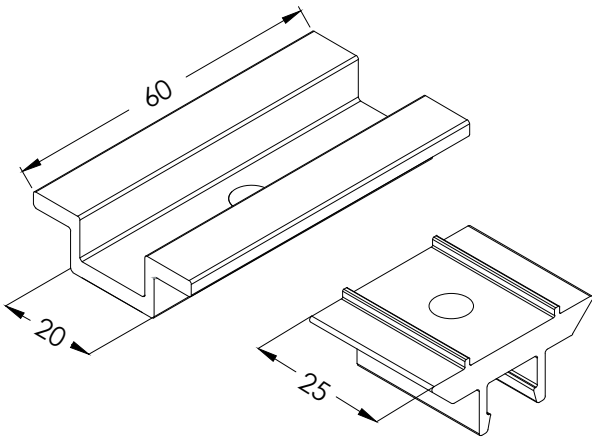

- 1) Insert the lower part of the clamp diagonally.
- 2) Turn until it touches the edge of the slot and press.
- 3) Align the clamp by matching the projections in the slot.
- 4) Tighten the screw to lock the module.

Valid for module thickness from 28 mm to 40 mm.

Specifications

Description	Central clamp to fix panels to each other
Length	60 mm
Module thickness	28-40 mm
Compatible profile	G3
Features	Screws: A2-70 stainless steel Trim: Aluminium EN AW 6005A T6 (Raw or anodised)
Tightening torque	Screw M6: 7 Nm

Tools required:



Safety:



100%
Recyclable

Marking
ES19/86524 CE