



Length: 150 mm

For guide rail




G1

Slide the rail G1 into the joint UG1 until they touch each other and centre the joint, leaving the same distance for each rail inside the joint.



x4

To lock the connection, fasten with 4 locking screws at the height of the lateral groove, 2 on each side of the rail, slightly offset so that they do not coincide on the same axis..

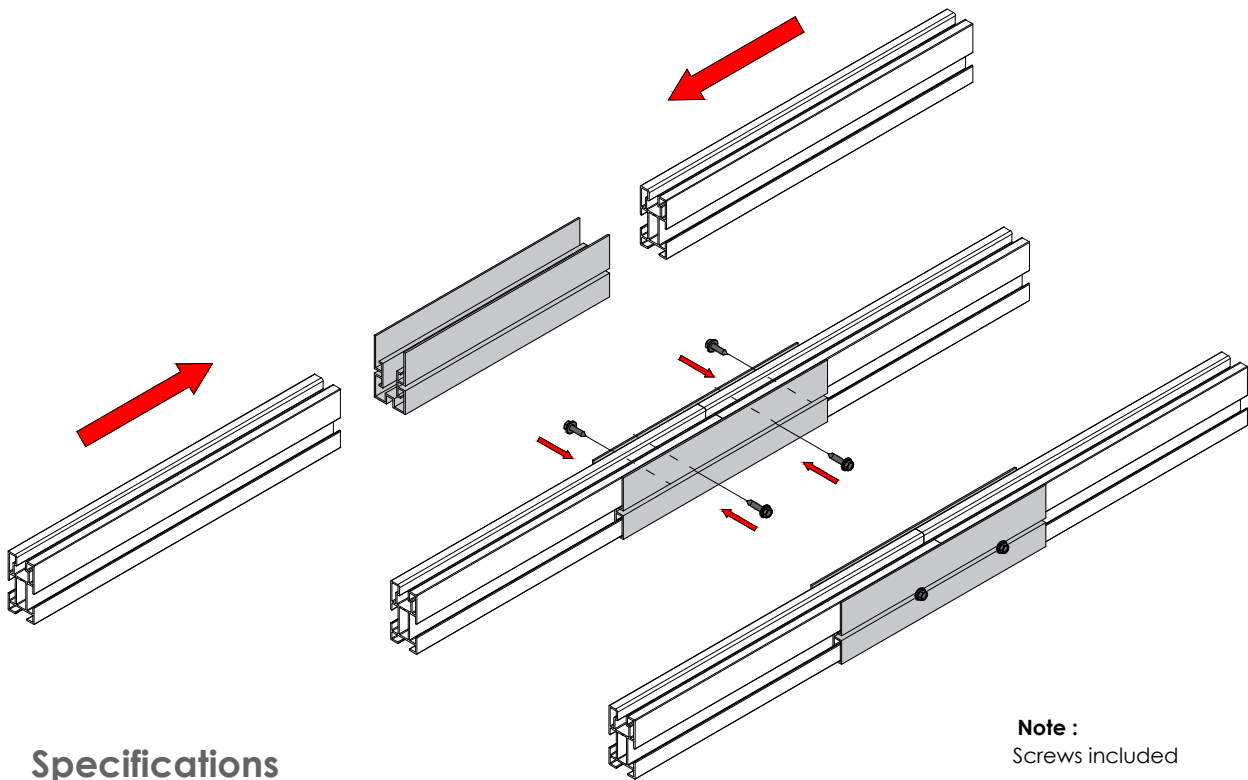

**Note :**  
Screws included

Specifications

|                   |                                                                                 |
|-------------------|---------------------------------------------------------------------------------|
| Description       | Connection for G1 rail: for continuous installation of panels.                  |
| Length            | 150 mm                                                                          |
| Features          | Fasteners: A2-70 stainless steel<br>Profiling: EN AW 6005A T6 (raw or anodised) |
| Compatible rail   | G1                                                                              |
| Fastening screws  | 4 Screws hexagonal M4.8 (Screws included)                                       |
| Tightening torque | Screw hexagonal M4.8: 6 Nm                                                      |

Tools required:



Sunfer Estructuras, S.L.U.

Safety:



100%  
Recyclable

Marking  
ES19/86524 CE

www.sunferenergy.com

Subject to change without notice. Product illustrations are for illustrative purposes only and may differ from the delivered product.