




Insert the UG3 into the G3 profiles until they touch and center the joint, leaving the same distance from each profile inside.



x4

Length: 150 mm

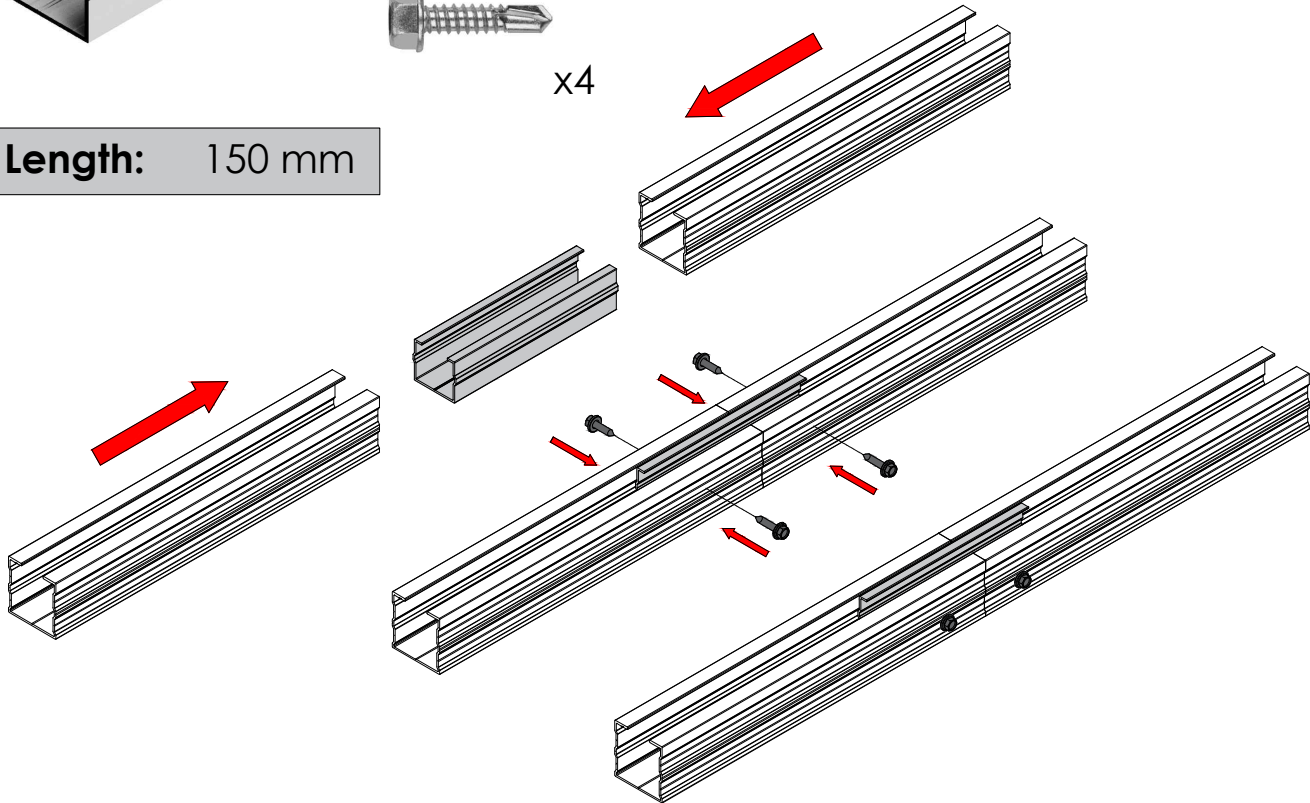

To lock the connection to the profiles, fix with 4 fixing screws. Each profile with 2 screws, 1 on each side of the joint.

Specifications

Description	Connection for G3 rail: for continuous installation of panels.
Length	150 mm
Features	Fasteners: A2-70 stainless steel Profiling: EN AW 6005A T6 (raw or anodised)
Compatible rail	G3
Fastening screws	4 Screws hexagonal M6.3 (Screws included)
Tightening torque	Screw M6.3 hexagonal: 10 Nm

Tools required:



Sunfer Estructuras, S.L.U.

Safety:



100%
Recyclable

Marking
ES19/86524 

www.sunferenergy.com

Subject to change without notice. Product illustrations are for illustrative purposes only and may differ from the delivered product.