

For guide rail



G6


Slide the rail G1 into the joint UG1 until they touch each other and centre the joint, leaving the same distance for each rail inside the joint.

To lock the connection, fasten with 4 locking screws at the height of the lateral groove, 2 on each side of the rail, slightly offset so that they do not coincide on the same axis..

Length: 150 mm



x4

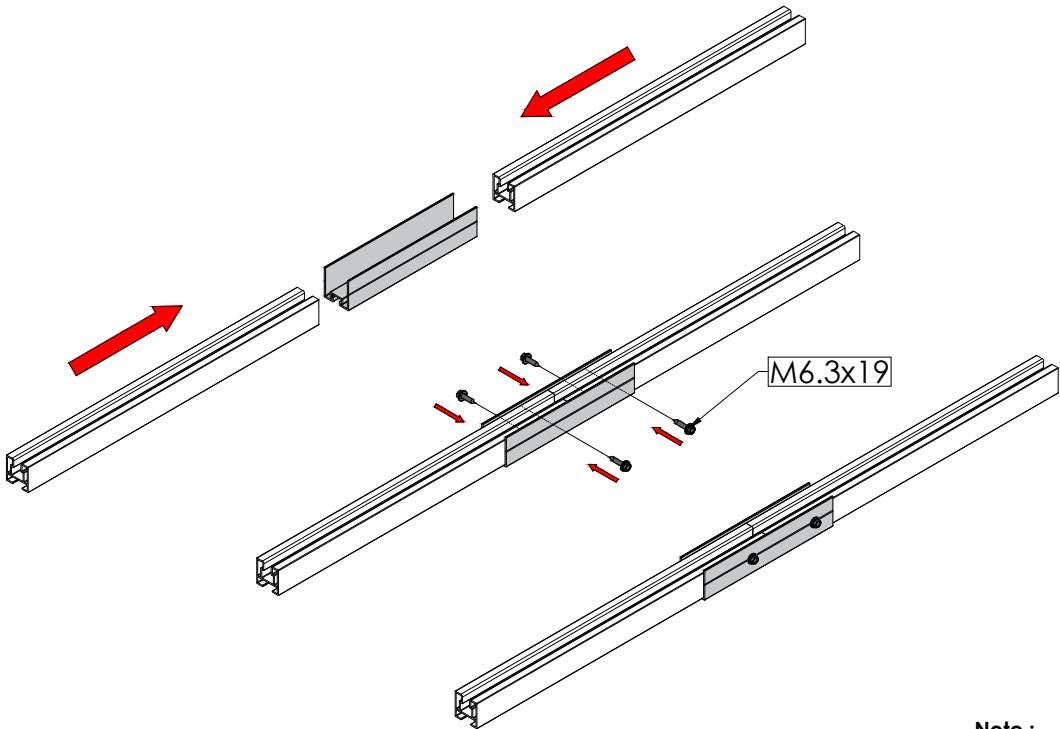

Note :
Screws included

Specifications

Description	Connection for G6 rail: for continuous installation of panels.
Length	150 mm
Features	Fasteners: A2-70 stainless steel Profiling: EN AW 6005A T6 (raw or anodised)
Compatible rail	G6
Fastening screws	4 Screws hexagonal M6.3 (Screws included)
Tightening torque	Screw hexagonal M6.3: 10 Nm

Tools required:



Sunfer Estructuras, S.L.U.

Safety:



100%
Recyclable

Marking
ES19/86524 CE

www.sunferenergy.com

Subject to change without notice. Product illustrations are for illustrative purposes only and may differ from the delivered product.